

## PRODUCT DATA SHEET


### ACRYLIC TAPE AC154

#### Product description

- Foamed Acrylic Tape
- Colour: Transparent

#### Construction

- Red PE Liner
- Acrylic adhesive

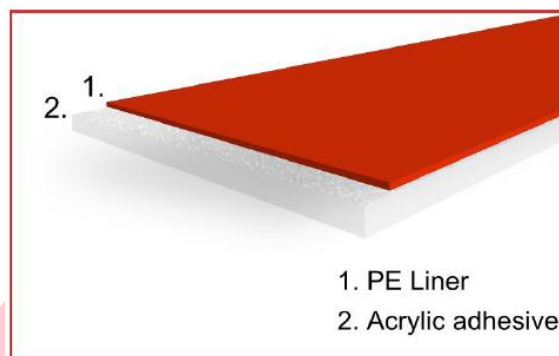

#### Technical data

Item	Unit		Spec.		Test method
<b>Total thickness</b>	mm	Inch	1.5(±0.1)	0.059(±0.004)	-
<b>Density</b>	kg/m <sup>3</sup>	lb/ft <sup>3</sup>	1000	62	-
<b>180° Peel Strength</b>	gf/25mm	lb/in	3290	7.4	ASTM-D-3330
<b>Tensile Strength</b> (T-Block Test)	gf/cm <sup>2</sup>	lb/in <sup>2</sup>	6000	85	ASTM-D-897
<b>Dynamic Shear</b> (after 20min)	g/cm <sup>2</sup>	lb/in <sup>2</sup>	3300	47	ASTM D-1002
<b>Dynamic Shear</b> (after 24h)	g/cm <sup>2</sup>	lb/in <sup>2</sup>	4000	57	ASTM D-1002
<b>Temperature Resistance</b> (Short Term)	°C	°F	150	302	-
<b>Temperature Resistance</b> (Long Term)	°C	°F	90	194	-
<b>Low Temp. Resistance</b>	°C	°F	-40	-40	-
<b>UV Resistance</b>	-	-	Good	-	-

#### Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Slepto s.r.o.. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application