

PRODUCT DATA SHEET


ACRYLIC TAPE AC204

Product description

- Foamed Acrylic Tape
- Colour: Transparent

Construction

- Red PE Liner
- Acrylic adhesive

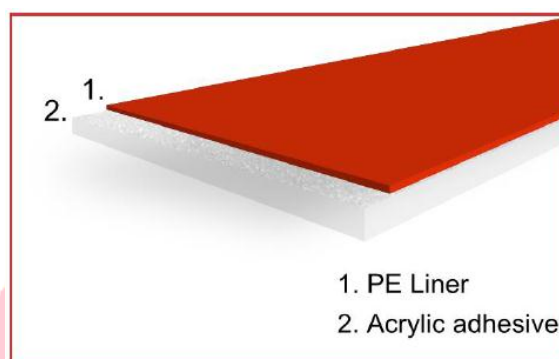

Technical data

Item	Unit		Spec.		Test method
Total thickness	mm	Inch	2.0(±0.1)	0.079(±0.004)	-
Density	kg/m ³	lb/ft ³	1000	62	-
180° Peel Strength	gf/25mm	lb/in	3800	8.5	ASTM-D-3330
Tensile Strength (T-Block Test)	gf/cm ²	lb/in ²	5000	71	ASTM-D-897
Dynamic Shear (after 20min)	g/cm ²	lb/in ²	2500	36	ASTM D-1002
Dynamic Shear (after 24h)	g/cm ²	lb/in ²	3500	50	ASTM D-1002
Temperature Resistance (Short Term)	°C	°F	160	320	-
Temperature Resistance (Long Term)	°C	°F	100	212	-
Low Temp. Resistance	°C	°F	-40	-40	-
UV Resistance	-	-	Good	-	-

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Slepto s.r.o.. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application